

TELESCOPIC PROPS

Telescopic strut poles are only used as under-mold carrier strut elements. It is quick and easy to set up, adjust to the desired height and disassemble. The system is practical, light and ergonomic.

Telescopic strut poles consist of two parts, outer and inner.


Strut pole outer elements are made of $\text{Ø}60 \times 3.0\text{mm}$ black pipe, inner elements are made of $\text{Ø}48 \times 3.0\text{mm}$ black pipe, base plate is made of $120 \times 120 \times 6\text{mm}$ sheet metal.


The carrying capacity is quite high compared to the material used.

It is produced in various heights:

3.00m – 3.50m – 4.00m – 4.50m – 5.00m – 5.50m


There are two options for coating; galvanized and painted.

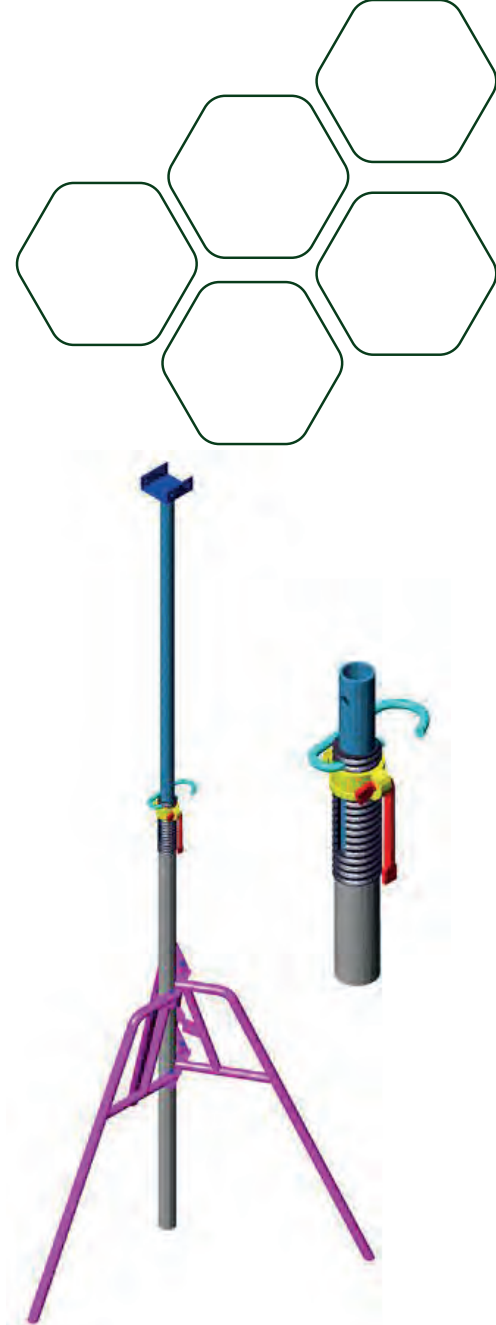


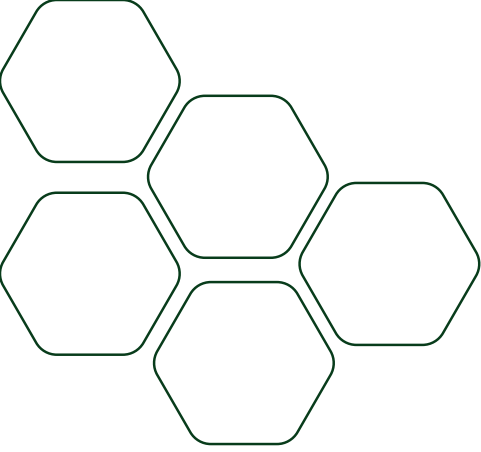

TELESCOPIC PROPS

The inner element of the telescopic pole is designed to move up and down inside the outer element. When it is adjusted to the desired height, the adjustment nut and the lock hairpin are locked by passing through the holes on the surface of the telescopic pole inner element. Thus, the installation of the telescopic pole is completed.

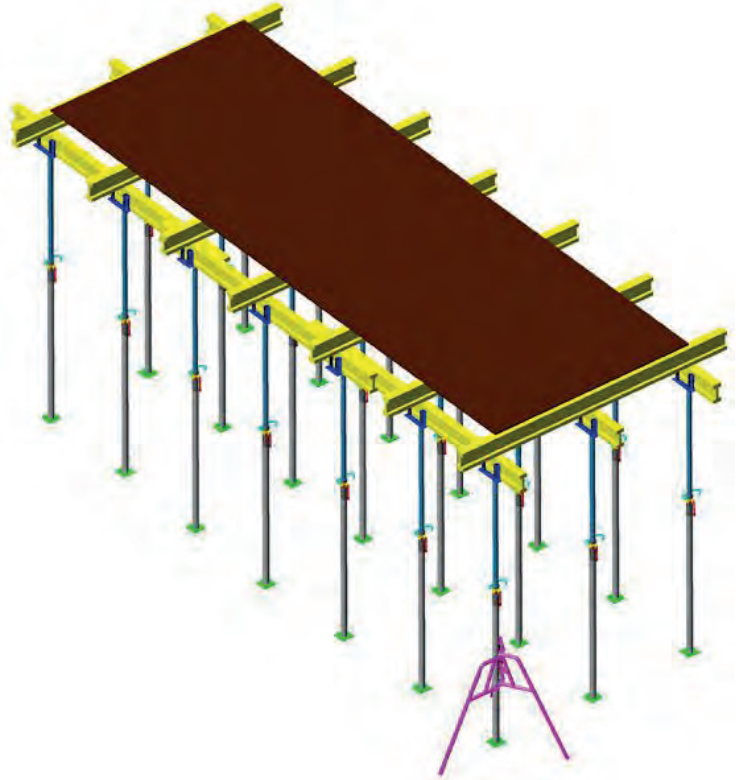

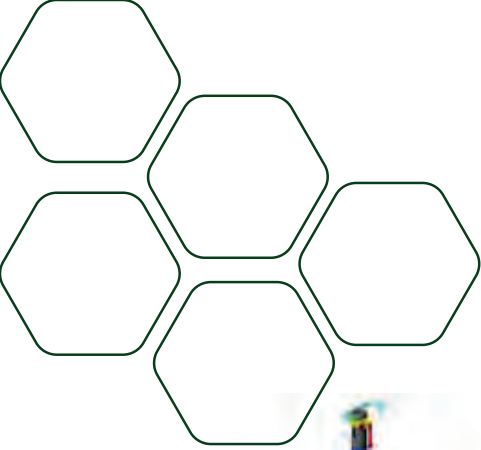








TELESCOPIC PROPS


TYPE I

Dimensions

		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
		TP-O-01	100	60 x 3,0	6,868
		TP-O-02	150	60 x 3,0	8,978
	OUTER TELESCOPIC PROPS	TP-O-03	200	60 x 3,0	11,088
		TP-O-04	250	60 x 3,0	13,198
			300	60 x 3,0	15,308
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
		TP-U-01	100	48 x3,0	4,107
		TP-U-02	150	48 x3,0	5,809
	INNER- U SHAPE HEADER	TP-U-03	200	48 x3,0	7,511
			250	48 x3,0	9,213
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
		TP-D-01	100	48 x3,0	5,163
		TP-D-02	150	48 x3,0	6,865
	INNER-T SHAPE HEADER	TP-D-03	200	48 x3,0	8,567
		TP-D-04	250	48 x3,0	10,269
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
		TP-F-01	100	48 x3,0	3,795
		TP-F-02	150	48 x3,0	5,497
	INNER-FLAT HEADER	TP-F-03	200	48 x3,0	7,199
		TP-F-04	250	48 x3,0	8,901
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
	TRIPOD	TP-T-00		32 x 3,0	11,673
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
	TWIST HANDLE NUT	TP-H-00		60	0,748
		Product Code	Height(cm)	Tube(Qxmm)	Weight(kg)
	PIN	TP-P-00	38 cm	12	0,339

TELESCOPIC PROPS

Dimensions

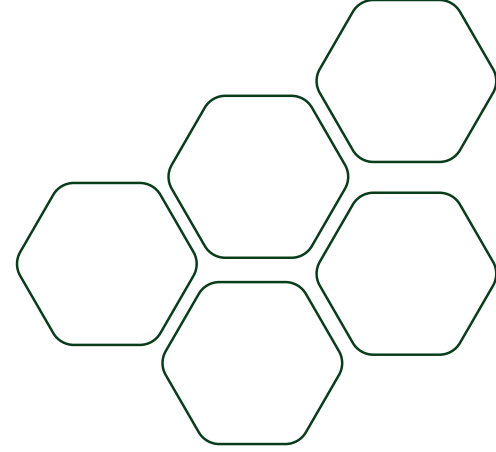

Twist Handle Nut



Tripod



Pin

Dimensions	A(outer)+B(inner)	Working Distance	Loading Capacity
3.0 m	1.5 m + 1.5 m	(1.80 m. - 2.75 m.)	2200 kg
3.5 m	2.0 m + 1.5 m	(2.30 m. - 3.25 m.)	1850 kg
4.0 m	2.0 m + 2.0 m	(2.30 m. - 3.75 m.)	1300 kg
4.5 m	2.5 m + 2.0 m	(2.80 m. - 4.25 m.)	1050 kg
5.0 m	3.0 m + 2.0 m	(3.30 m. - 4.75 m.)	900 kg
5.5 m	3.0 m + 2.5 m	(3.30 m. - 5.25 m.)	750 kg



Flat Header




Four Way Header



U Shape Header





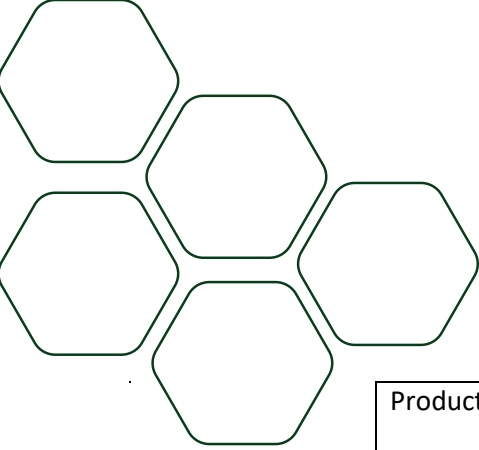




T Shape Header



TELESCOPIC PROPS

TYPE II

	Product Name	Product Code	Height (cm)	Tube (Qxmm)	Weight (kg)
	OUTER TELESCOPIC PROBS	TP-O-01	100	60X1.80	4,120
		TP-O-02	150	60X1.80	5,386
		TP-O-03	200	60X1.80	6,652
		TP-O-04	250	60X1.80	7,914
		TP-O-05	300	60X1.80	9,184
	INNER U SHAPE HEADER	TP-U-01	100	48X1.80	2,464
		TP-U-02	150	48X1.80	3,485
		TP-U-03	200	48X1.80	4,506
		TP-U-04	250	48X1.80	5,527
	INNER T SHAPE HEADER	TP-T-01	100	48X1.80	3,097
		TP-T-02	150	48X1.80	4,119
		TP-T-03	200	48X1.80	5,140
		TP-T-04	250	48X1.80	6,161
	INNER FLAT HEADER	TP-F-01	100	48X1.80	2,277
		TP-F-02	150	48X1.80	3,298
		TP-F-03	200	48X1.80	4,319
		TP-F-04	250	48X1.80	4.340
	TRIPOD	TP-T-00		32X3.0	11,673
	TWIST HANDLE NUT	TP-H-00		60	0.748
	PIN	TP-P-00	38	12	0.339